



EV9318-60

Exubera Water Appliance

Exubera: EV9318-60



BENEFITS

- Produces ambient, chilled and chilled carbonated water
- Combined with Everpure filtration technologies, allows for premium carafe water
- Capable of supplying water- cooled to 40°F
- Efficient ice bank technology
- Consumes only 350 watts of electricity when compressor is cycling
- Can be plumbed to coffee or ice machine
- Durable construction
- UL Approved

INSTALLATION TIPS

- Position the appliance in the point of installation, away from sources of heat and direct sunlight
- Do not install the appliance outdoors and in very damp rooms
- The appliance should be positioned in such a way as to leave approximately 2.40 to 2.80 inches of space free for air to circulate freely
- Fill the ice bank before connecting CO₂, main water supply or power
- Requires CO₂ cylinder to provide carbonation (EV9318-62)
- Before connecting CO₂, run water through dispenser
- Flush all dispensers before use
- Ensure John Guest fittings are secure before operation

OPERATION TIPS

- To ensure the highest quality water, use in combination with an Everpure filtration system
- Before making the water connection, make sure the incoming water pressure is between 14.5 psi and 43.5 psi
- If the incoming water pressure is below 14.5 psi or the flow rate is less than 0.50 gpm, fit a device capable of increasing the pressure (such as an autoclave or similar)
- The pressure is especially important for those water coolers fitted with a carbonation device
- If the incoming water pressure exceeds 43.5 psi, predispose a pressure reducer capable of reducing the latter to the 14.5 psi and 43.5 psi
- Advice on using the appliance for carbonated water: To guarantee the correct operation of the pump in time, the appliance must always be operated with water in the cooling circuit

APPLICATION/SIZING

- Maximum Cold Water Capacity: 6.6 gph
- Suggested tubing: 3/8" OD, 1/4" ID polyethylene tubing

Exubera Water Appliance

SPECIFICATIONS

Overall dimensions:
16"H x 10"W x 18"D

Inlet & Outlet connections:
1/4" O.D. for inlet and 6 mm O.D. tubes for
outlets


Power Supply:
115 VAC @ 60 Hz, 350 W

Compressor Power:
1/12 HP

Refrigerant Gas:
CFC Free R134a

Maximum Cold Water Capacity:
6.6 gph

Water Pressure Range:
14.5 - 43.5 PSI (2 - 3 Bars)

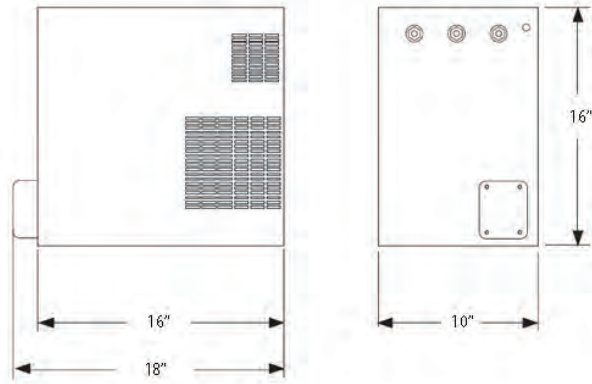

Need UL Logo here

WARRANTY

Everpure water treatment systems (excluding replaceable elements) are covered by a limited warranty against defects in material and workmanship for a period of five years after date of purchase. Everpure replaceable elements (filter cartridges and water treatment cartridges) are covered by a limited warranty against defects in material and workmanship for a period of one year after date of purchase. See printed warranty for details. Everpure will provide a copy of the warranty upon request.

EVERPURE®

Worldwide Headquarters:
EVERPURE, LLC
1040 Muirfield Drive
Hanover Park, Illinois 60133
Toll Free (800) 323-7873
Tel (630) 307-3000
Fax (630) 307-3030
<http://www.everpure.com>

In Europe:
Pentair Water Belgium B.V./B.A.
Industriepark Wolfstee
Toekomstlaan 30
B- 2200 Herentals
BELGIUM
TEL: +32.(0).14.283.500
FAX: +32.(0).14.283.505

In Japan:
Hashimoto MN Bldg. 7F
3-25-1 Hashimoto Sagamihara-Shi
Kanagawa 229-1103
JAPAN
TEL: 81.(0)42.775.3011
FAX: 81.(0)42.775.3015

Everpure
1040 Muirfield Drive
Hanover Park, IL 60133